
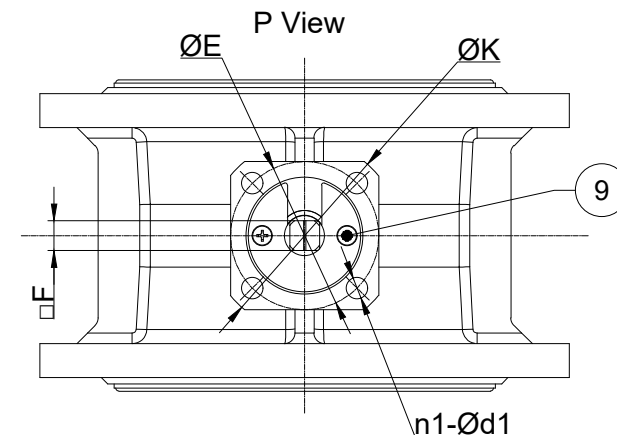


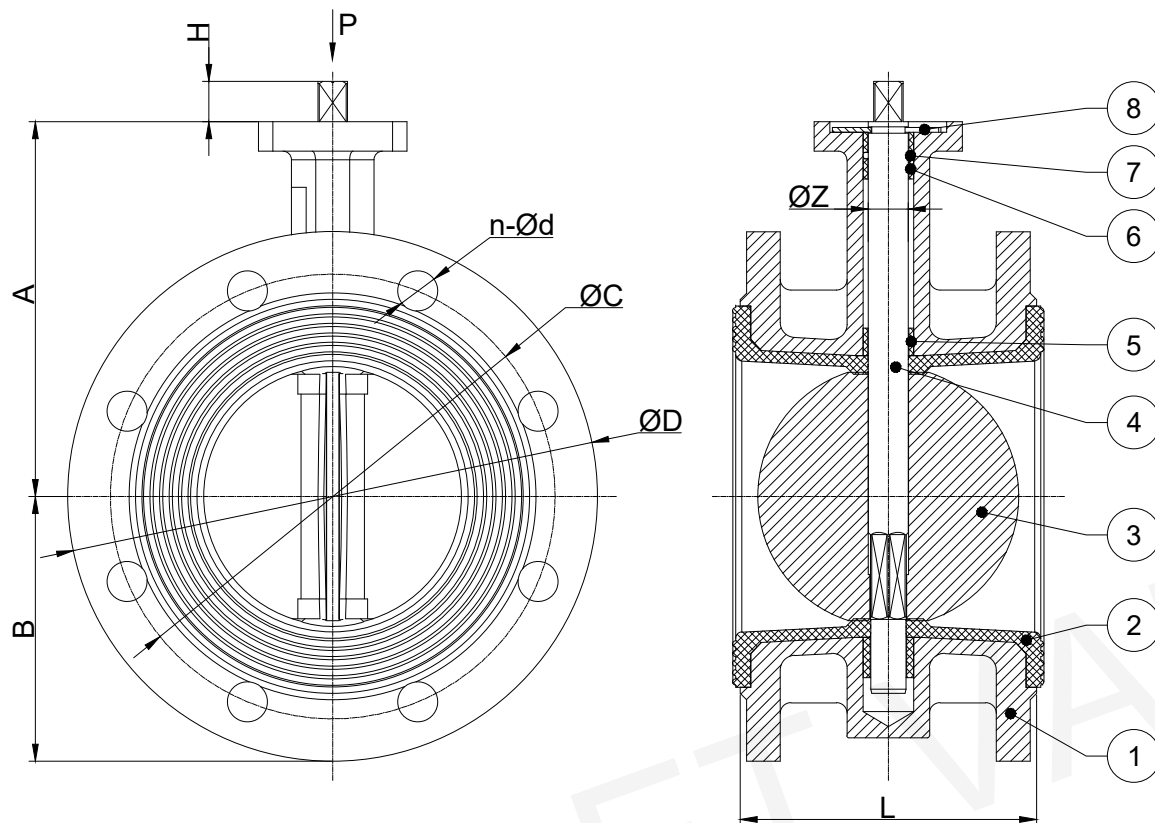

No.	Part Name	Material
1	Body	DI/CF8/CF8M/CF3M/2205/2507/WCB
2	Seat	EPDM/NBR/VITON/PTFE
3	Disc	DI/CF8/CF8M/CF3M/C95400/2205/2507
4	Shaft	SS420
5	Long Bushing	FRP
6	Short Bushing	FRP
7	O-Ring	NBR
8	U-Card	SS430
9	Screw	SS304

Double-Flange Rubber-Lined Butterfly Valve DN50-DN300

DN	INCH	L±2	A±1	B±1 (PN10/PN16)	H	F	ØZ	ISO 5211				PN10			PN16		
mm	in							Actuator Flange	ØK	ØE	n1-Ød1	ØD	ØC	n-Ød	ØD	ØC	n-Ød
50	2	108	130	82.5/82.5	11.5	11X11	12.60	F05	65	50	4-Ø7	165	125	4-Ø19	165	125	4-Ø19
65	2.5	112	139	92.5/92.5	15	11X11	12.60	F05	65	50	4-Ø7	185	145	4或8-Ø19	185	145	4或8-Ø19
80	3	114	149	100/100	15	11X11	12.60	F05	65	50	4-Ø7	200	160	8-Ø19	200	160	8-Ø19
100	4	127	156	110/110	15	11X11	15.77	F07	90	70	4-Ø10	220	180	8-Ø19	220	180	8-Ø19
125	5	140	177	125/125	19	14X14	18.92	F07	90	70	4-Ø10	250	210	8-Ø19	250	210	8-Ø19
150	6	140	199	142.5/142.5	19	14X14	18.92	F07	90	70	4-Ø10	285	240	8-Ø23	285	240	8-Ø23
200	8	152	225	170/170	20	17X17	22.10	F10	125	102	4-Ø12	340	295	8-Ø23	340	295	12-Ø23
250	10	165	252	197.5/202.5	24	22X22	28.45	F10	125	102	4-Ø12	395	350	12-Ø23	405	355	12-Ø28
300	12	178	308	222.5/230	26	22X22	31.60	F10	125	102	4-Ø12	445	400	12-Ø23	460	410	12-Ø28