


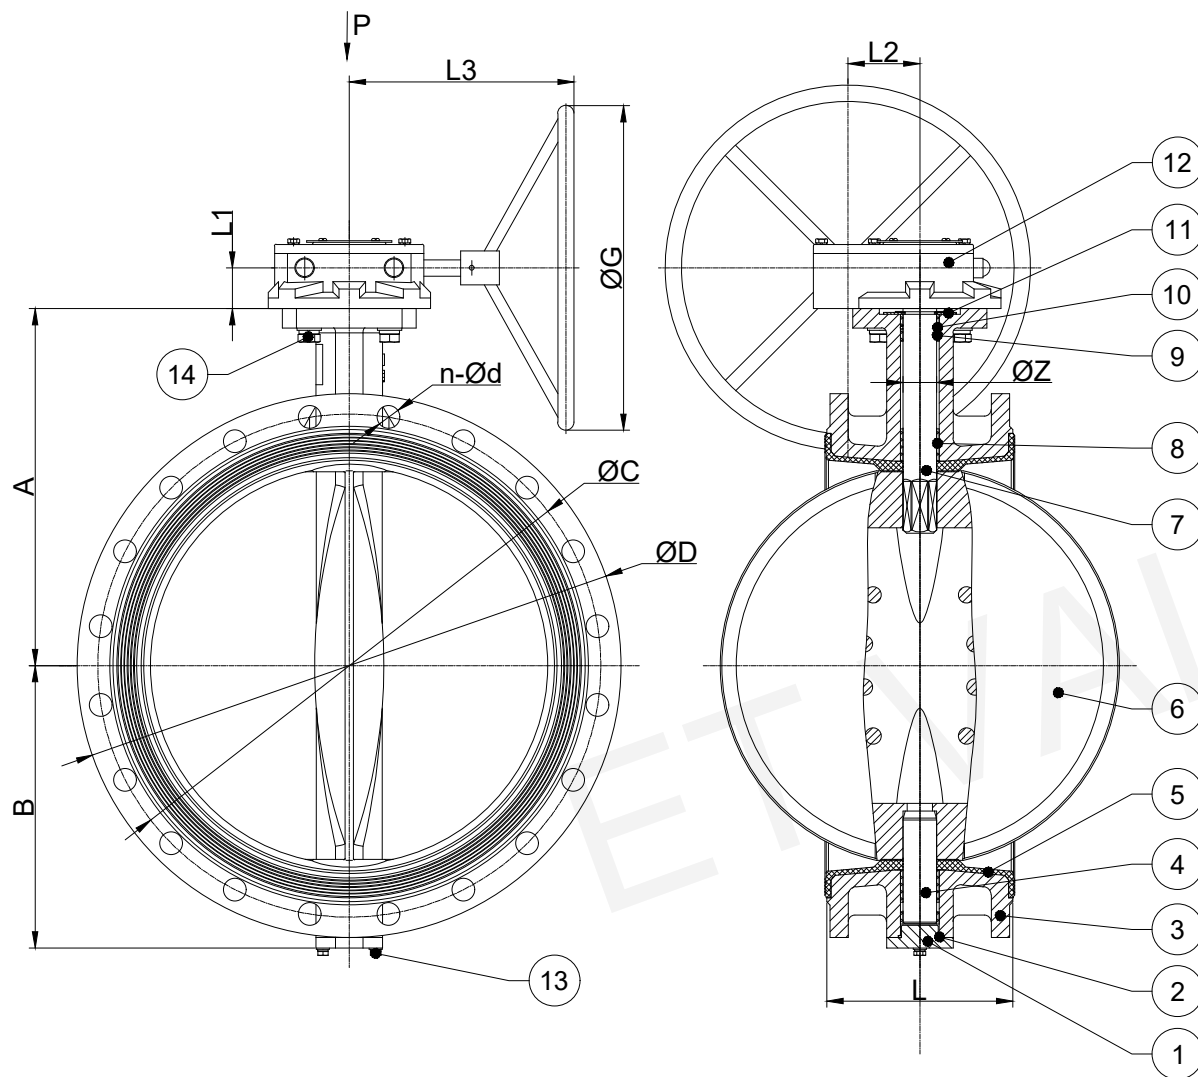

No.	Part Name	Material
1	End Cover	DI/CF8/CF8M/CF3M/2205/2507/WCB
2	O-Ring	NBR
3	Body	DI/CF8/CF8M/CF3M/2205/2507/WCB
4	Lower Shaft	SS431
5	Seat	EPDM/NBR/VITON/PTFE
6	Disc	DI/CF8/CF8M/CF3M/C95400/2205/2507
7	Upper Shaft	SS431
8	Long Bushing	FRP
9	Short Bushing	FRP
10	O-Ring	NBR
11	U-Card	SS430
12	Gear Box	DI
13	Bolt/Washer/ Spring Washer	SS304
14	Bolt/Washer/ Spring Washer	SS304
15	Screw	SS304

Gear Double-Flange Rubber-Lined Butterfly Valve DN400-DN600

DN	INCH	L±2	A±1	B±1 (PN10/PN16)	F	ØZ	ISO 5211				PN10			PN16			L1	L2	L3	ØG
mm	in						Actuator Flange	ØK	ØE	n1-Ød1	ØD	ØC	n-Ød	ØD	ØC	n-Ød				
400	16	216	353	289/290	27X27	33.15	F14	175	140	4-Ø18	565	515	16-Ø28	580	525	16-Ø31	50	89	277	400
450	18	222	402	316/320	27X27	37.95	F14	175	140	4-Ø18	615	565	20-Ø28	640	585	20-Ø31	50	101	287	400
500	20	229	441	357/357	36X36	41.12	F14/F16	210	140/165	4-Ø18/Ø22	670	620	20-Ø28	715	650	20-Ø34	50	101	287	400
600	24	267	513	393/420	36X36	50.62	F16	210	165	4-Ø22	780	725	20-Ø31	840	770	20-Ø37	50	153	382	500