


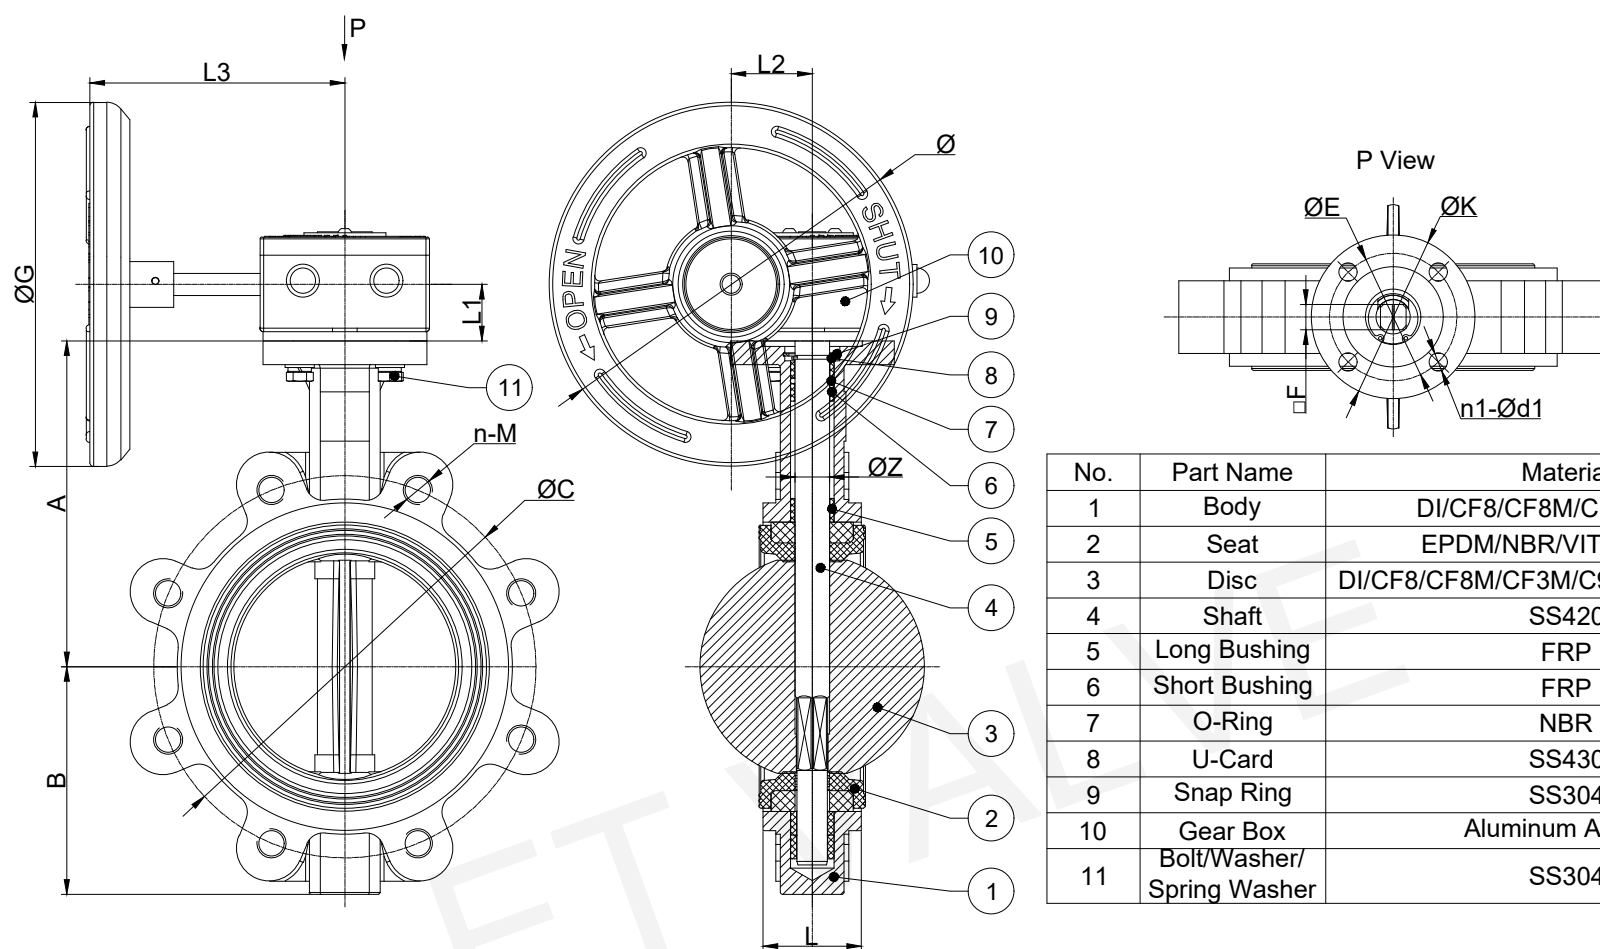

Gear Lug-Type Backrest-Seated Butterfly Valve DN40-DN300

DN	INCH	L±2	A±1	B±1	F	ØZ	ISO 5211				PN10		PN16		PN25		150LB		L1	L2	L3	ØG
							Actuator Flange	ØK	ØE	n1-Ød1	ØC	n-M	ØC	n-M	ØC	n-M	ØC	n-M				
40	1.5	33	123	65	11X11	12.60	F05	65	50	4-Ø7	110	4-M16	110	4-M16	110	4-M16	98.6	4-(1/2-13UNC-2B)	30	44	133	120
50	2	43	129	69	11X11	12.60	F05	65	50	4-Ø7	125	4-M16	125	4-M16	125	4-M16	120.6	4-(5/8-11UNC-2B)	30	44	133	120
65	2.5	46	137	80	11X11	12.60	F05	65	50	4-Ø7	145	4-M16	145	4-M16	145	8-M16	139.7	4-(5/8-11UNC-2B)	30	44	133	120
80	3	46	144	95	11X11	12.60	F05	65	50	4-Ø7	160	8-M16	160	8-M16	160	8-M16	152.4	4-(5/8-11UNC-2B)	30	44	133	120
100	4	52	163	109	11X11	15.77	F07	90	70	4-Ø10	180	8-M16	180	8-M16	190	8-M20	190.5	8-(5/8-11UNC-2B)	30	44	133	120
125	5	56	179	125	14X14	18.92	F07	90	70	4-Ø10	210	8-M16	210	8-M16	220	8-M24	215.9	8-(3/4-10UNC-2B)	30	44	139	200
150	6	56	198	137	14X14	18.92	F07	90	70	4-Ø10	240	8-M20	240	8-M20	250	8-M24	241.3	8-(3/4-10UNC-2B)	30	44	139	200
200	8	60	237	173	17X17	22.10	F10	125	102	4-Ø12	295	8-M20	295	12-M20	310	12-M24	298.4	8-(3/4-10UNC-2B)	37.5	63	246	300
250	10	68	281	206	22X22	28.45	F10	125	102	4-Ø12	350	12-M20	355	12-M24	370	12-M27	362.0	12-(7/8-9UNC-2B)	37.5	63	246	300
300	12	78	318	244	22X22	31.60	F10	125	102	4-Ø12	400	12-M20	410	12-M24	430	16-M27	431.8	12-(7/8-9UNC-2B)	40.5	76	246	300