


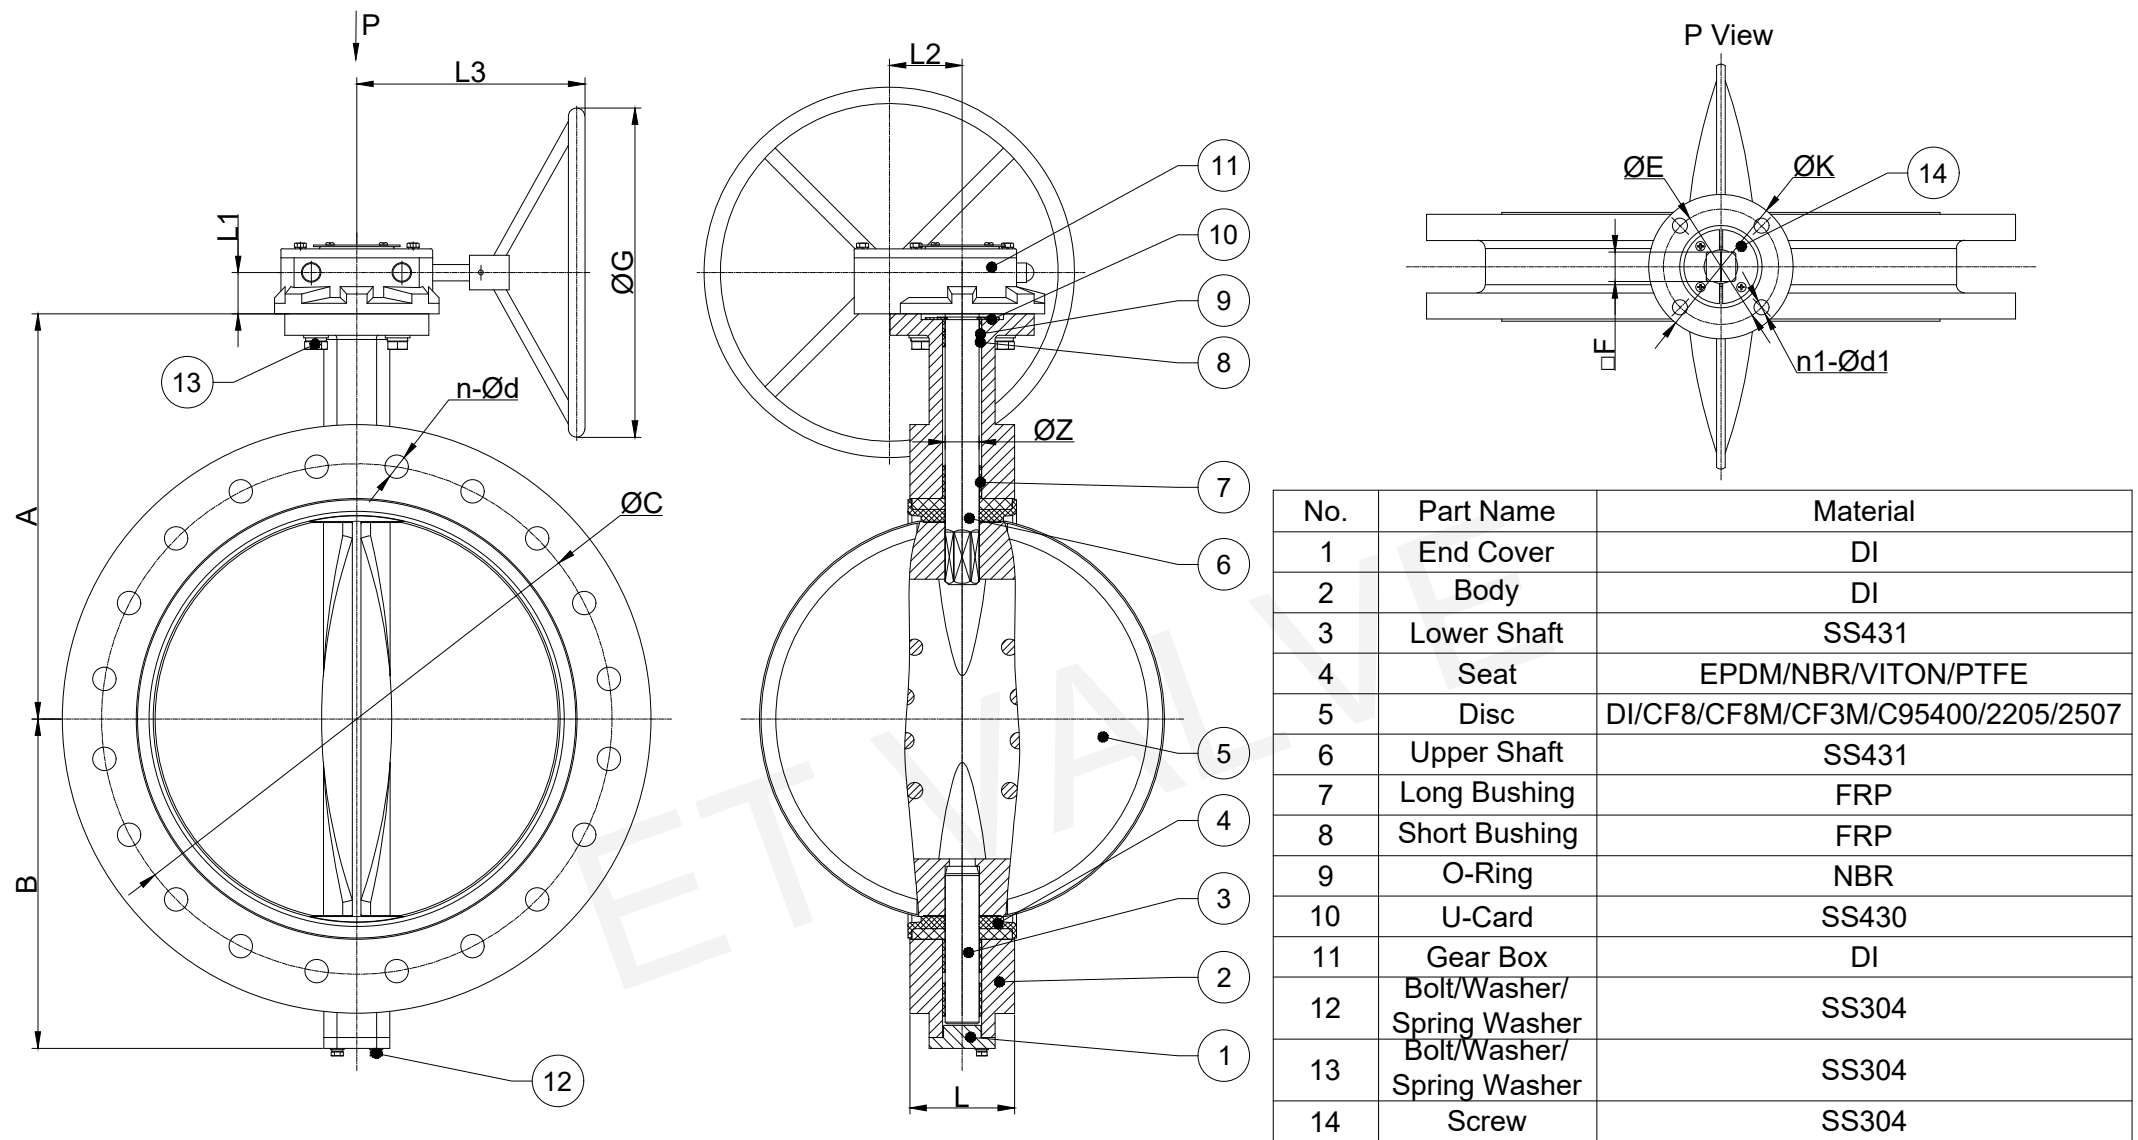

Gear U-Type Backrest-Seated Butterfly Valve DN400-DN600

DN	INCH	L±2	A±1	B±1	F	ØZ	ISO 5211				PN10		PN16		150LB		L1	L2	L3	ØG
							Actuator Flange	ØK	ØE	n1-Ød1	ØC	n-Ød	ØC	n-Ød	ØC	n-Ød				
400	16	102	410	326	27X27	33.15	F14	175	140	4-Ø18	515	16-Ø28	525	16-Ø31	539.8	16-Ø28.6	50	89	277	400
450	18	114	430	343	27X27	37.95	F14	175	140	4-Ø18	565	20-Ø28	585	20-Ø31	577.8	16-Ø31.8	50	101	287	400
500	20	127	492	387	36X36	41.12	F14	175	140	4-Ø18	620	20-Ø28	650	20-Ø34	635.0	20-Ø31.8	50	101	287	400
600	24	154	584	445	36X36	50.62	F16	210	165	4-Ø22	725	20-Ø31	770	20-Ø37	749.3	20-Ø35	50	153	382	500