
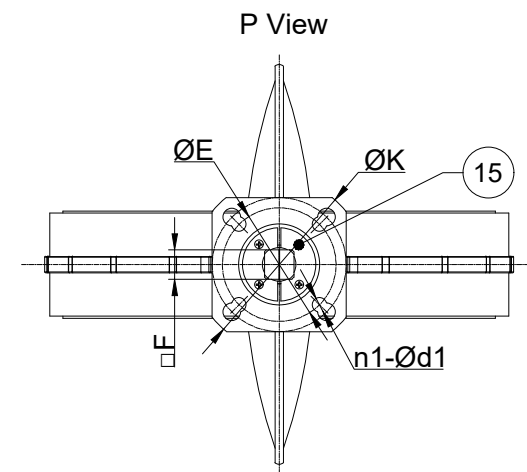


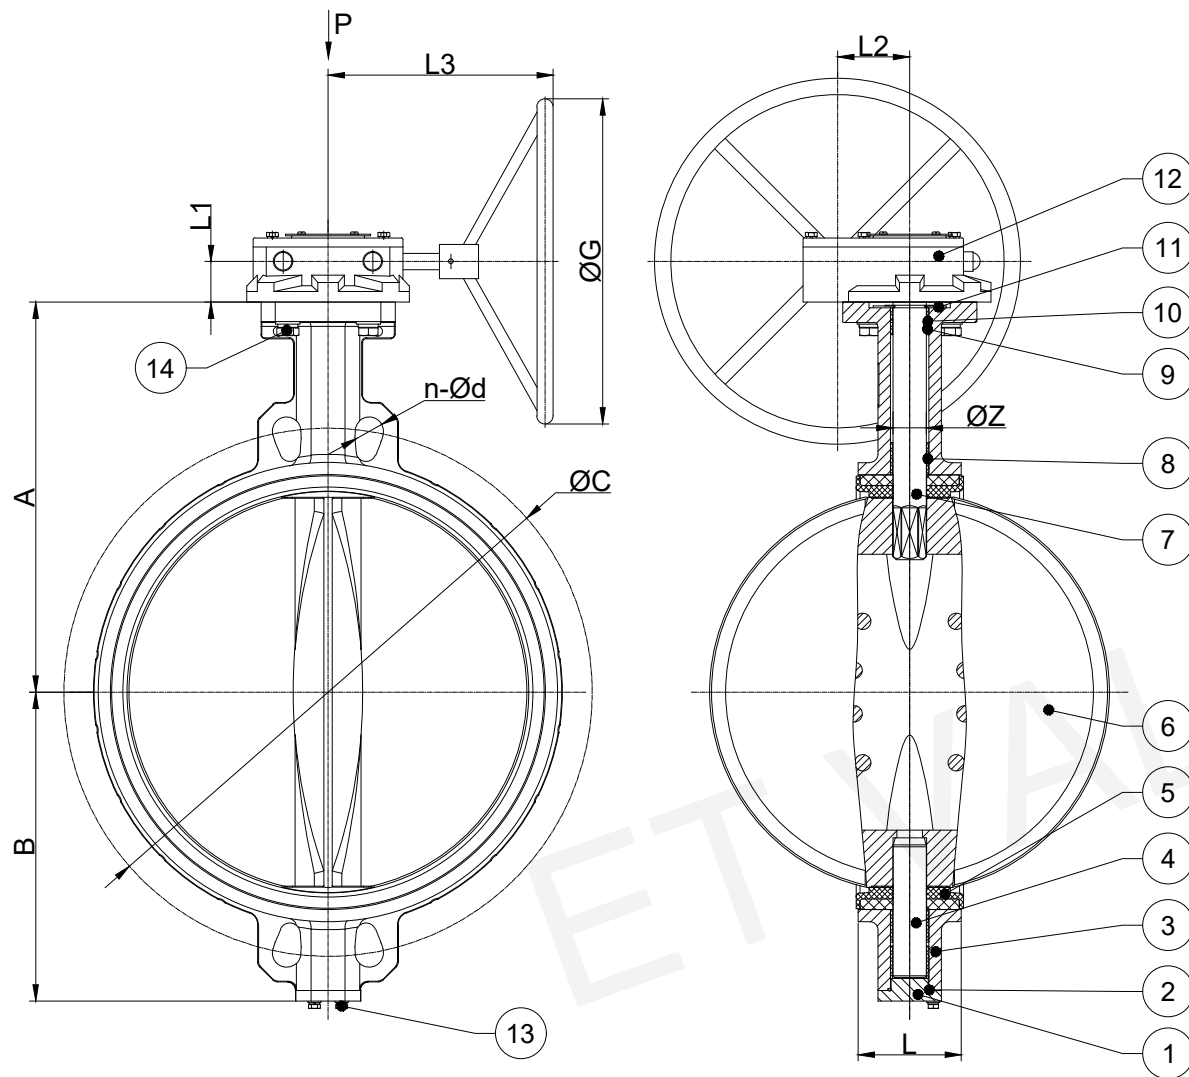

No.	Part Name	Material
1	End Cover	DI/CF8/CF8M/CF3M/2205/2507/WCB
2	O-Ring	NBR
3	Body	DI/CF8/CF8M/CF3M/2205/2507/WCB
4	Lower Shaft	SS431
5	Seat	EPDM/NBR/VITON/PTFE
6	Disc	DI/CF8/CF8M/CF3M/C95400/2205/2507
7	Upper Shaft	SS431
8	Long Bushing	FRP
9	Short Bushing	FRP
10	O-Ring	NBR
11	U-Card	SS430
12	Gear Box	DI
13	Bolt/Washer/ Spring Washer	SS304
14	Bolt/Washer/ Spring Washer	SS304
15	Screw	SS304

Gear Wafer-Type Backrest-Seated Butterfly Valve DN400-DN600

DN	INCH	L±2	A±1	B±1	F	ØZ	ISO 5211				PN10		PN16		150LB		10K		L1	L2	L3	ØG
mm	in						Actuator Flange	ØK	ØE	n1-Ød1	ØC	n-Ød	ØC	n-Ød	ØC	n-Ød	ØC	n-Ød				
400	16	102	402	325	27X27	33.15	F14	175	140	4-Ø18	515	16-Ø28	525	16-Ø31	539.8	16-Ø28.6	510	16-Ø27	50	89	277	400
450	18	114	423	346	27X27	37.95	F14	175	140	4-Ø18	565	20-Ø28	585	20-Ø31	577.8	16-Ø31.8	565	20-Ø27	50	101	287	400
500	20	127	480	380	36X36	41.12	F14/F16	210	140/165	4-Ø18/Ø22	620	20-Ø28	650	20-Ø34	635.0	20-Ø31.8	620	20-Ø27	50	101	287	400
600	24	154	563	459	36X36	50.62	F16	210	165	4-Ø22	725	20-Ø31	770	20-Ø37	749.3	20-Ø35	-	-	50	153	382	500