


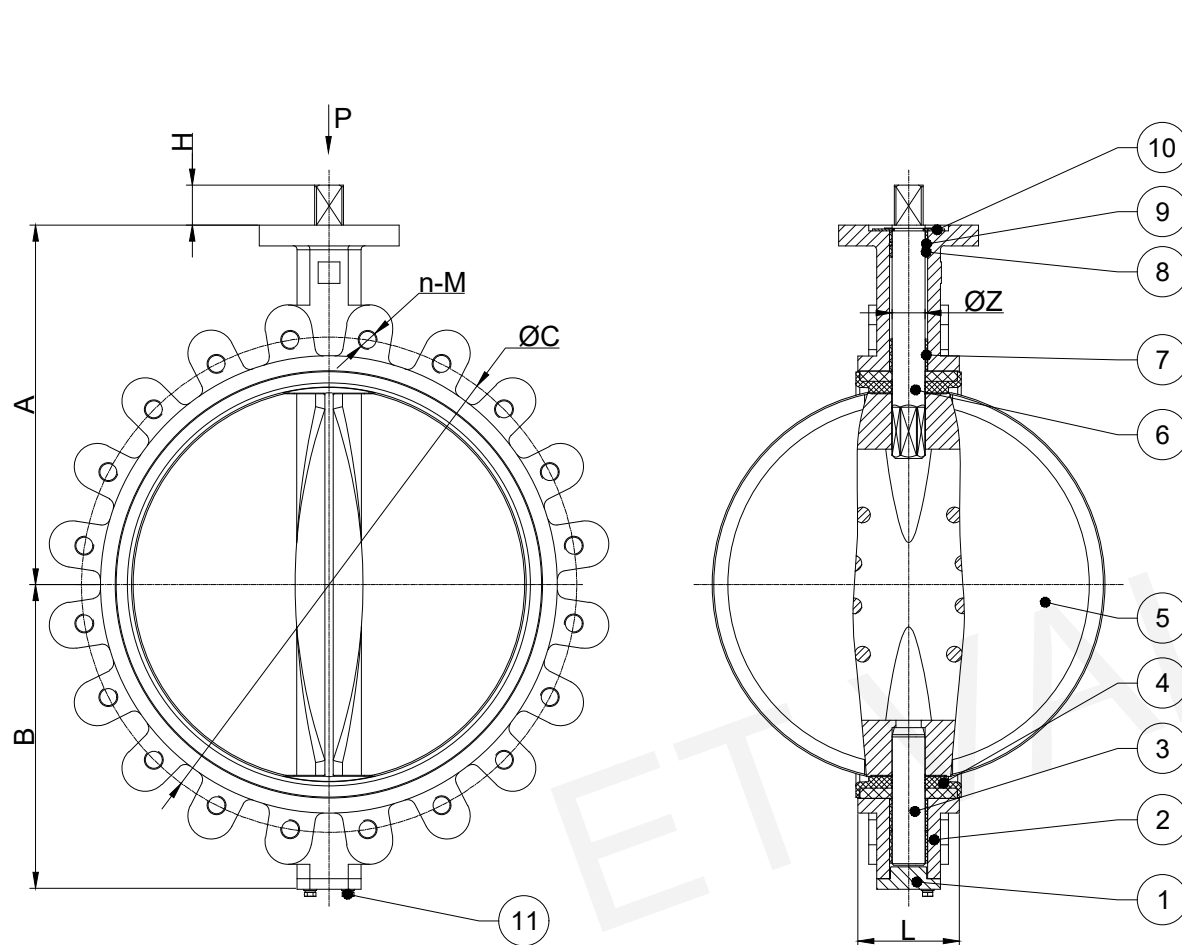

No.	Part Name	Material
1	End Cover	DI/CF8/CF8M/CF3M/2205/2507/WCB
2	Body	DI/CF8/CF8M/CF3M/2205/2507/WCB
3	Lower Shaft	SS431
4	Seat	EPDM/NBR/VITON/PTFE
5	Disc	DI/CF8/CF8M/CF3M/C95400/2205/2507
6	Upper Shaft	SS431
7	Long Bushing	FRP
8	Short Bushing	FRP
9	O-Ring	NBR
10	U-Card	SS430
11	Bolt/Washer/ Spring Washer	SS304
12	Screw	SS304

Lug-Type Backrest-Seated Butterfly Valve DN400-DN600

DN mm	INCH in	L±2	A±1	B±1	H	F	ØZ	ISO 5211				PN10		PN16		150LB	
								Actuator Flange	ØK	ØE	n1-Ød1	ØC	n-M	ØC	n-M	ØC	n-M
400	16	102	371	318	40	27X27	33.15	F14	175	140	4-Ø18	515	16-M24	525	16-M27	539.8	16-(1-8UNC-2B)
450	18	114	411.5	352	50	27X27	37.95	F14	175	140	4-Ø18	565	20-M24	585	20-M27	577.8	16-(1½-8UN-2B)
500	20	127	450	382	50	36X36	41.12	F14	175	140	4-Ø18	620	20-M24	650	20-M30	635.0	20-(1½-8UN-2B)
600	24	154	515	445	50	36X36	50.62	F16	210	165	4-Ø22	725	20-M27	770	20-M33	749.3	20-(1¼-8UN-2B)