


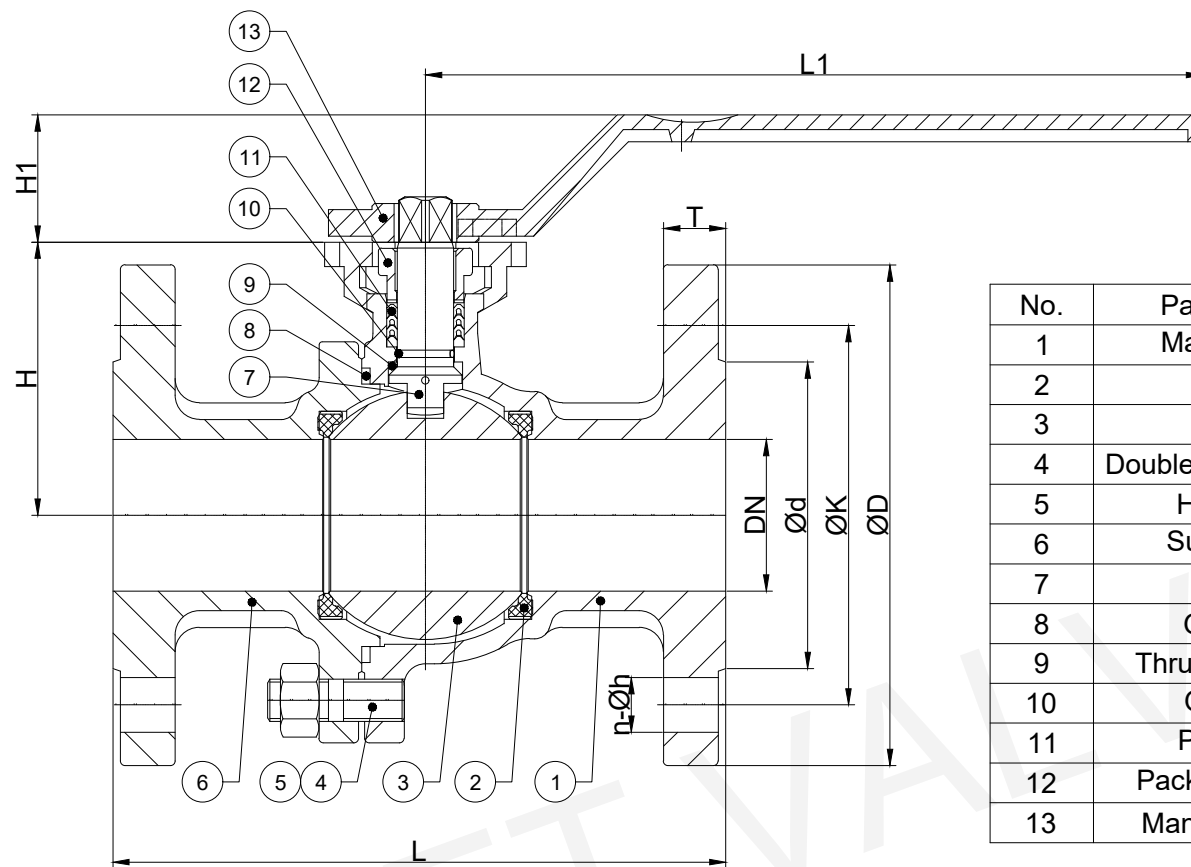

No.	Part Name	Material
1	Main Body	WCB/CF8
2	Seat	PTFE
3	Ball	SS304/SS316L
4	Double-Ended Stud	Property Class8.8/SS304
5	Hex Nut	Property Class8/SS304
6	Sub Body	WCB/CF8
7	Stem	SS304/SS316
8	Gasket	PTFE
9	Thrust Washer	R-PTFE
10	O-Ring	FKM
11	Packing	PTFE
12	Packing Gland	WCB/CF8
13	Manual Lever	SS304

Manual Lever Two-Piece Flange Ball Valve DN15-DN125

DN	INCH	L±2	ØD	ØK	Ød	T	n-Øh	H	L1	H1
mm	in									
15	1/2	130	95	65	45	16	4-Ø14	51	160	27
20	3/4	130	105	75	58	18	4-Ø14	53	160	27
25	1	140	115	85	68	18	4-Ø14	67	190	31
32	1¼	165	140	100	78	18	4-Ø18	71	190	31
40	1½	165	150	110	88	18	4-Ø18	80	230	35
50	2	203	165	125	102	18	4-Ø18	90	230	35
65	2½	222	185	145	122	18	(4)8-Ø18	120	300	41
80	3	241	200	160	138	20	8-Ø18	127	300	41
100	4	305	220	180	158	20	8-Ø18	158	320	45
125	5	356	250	210	188	22	8-Ø18	180	320	45