


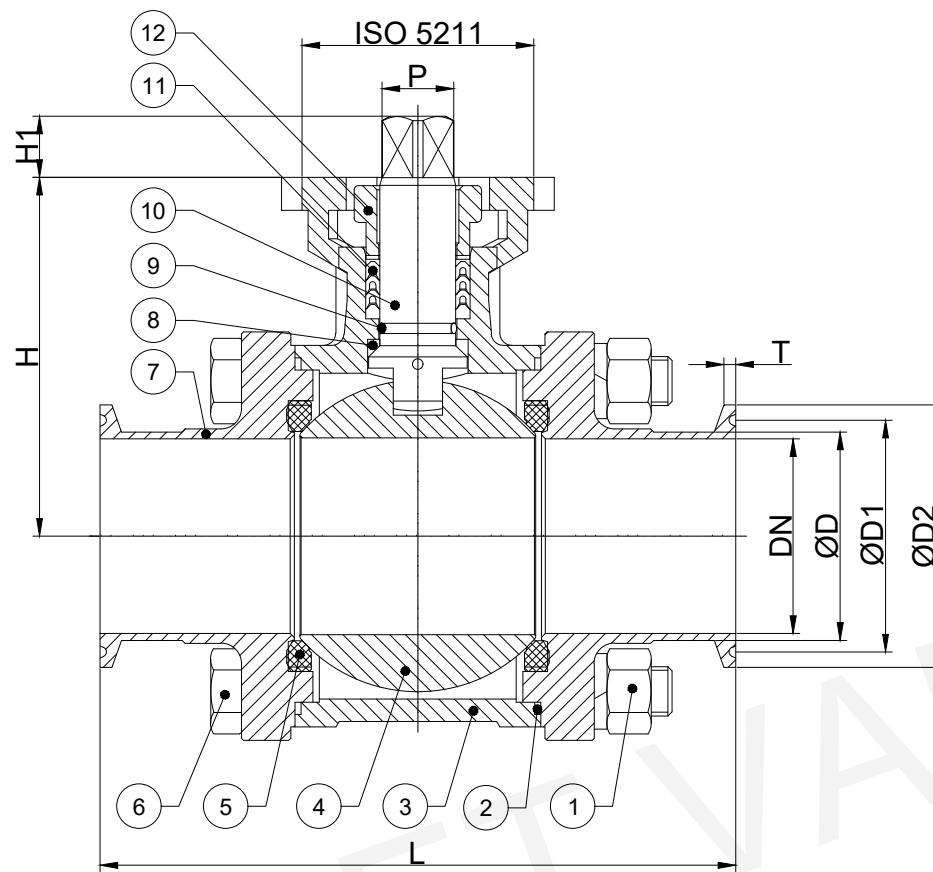

No.	Part Name	Material
1	Hex Nut	SS304
2	Gasket	PTFE/R-PTFE
3	Main Body	WCB/CF8/CF3M
4	Ball	SS304/SS316L
5	Seat	PTFE/R-PTFE
6	Bolt	SS304
7	Bonnet	WCB/CF8/CF3M
8	Thrust Washer	R-PTFE
9	O-Ring	FKM
10	Stem	SS304/SS316L
11	Packing	PTFE/R-PTFE
12	Packing Gland	WCB/CF8

Three-Piece Clamp Ball Valve DN10-DN100

DN	INCH	L±2	ØD	ØD1	ØD2	T	H	H1	P	ISO 5211	
mm	in									Actuator Flange	Pitch Circle Diameter
10	1/2	90	14.3	18.0	24.4	2.85	46	9	9X9	F03 F05	Ø36 Ø50
15.7	3/4	100	19.0	43.5	50.5	2.85	47.5	9	9X9	F03 F05	Ø36 Ø50
22.1	1	115	25.4	43.5	50.5	2.85	60	11	11X11	F04 F05	Ø42 Ø50
28.5	1¼	125	31.8	43.5	50.5	2.85	64	11	11X11	F04 F05	Ø42 Ø50
34.8	1½	140	38.1	43.5	50.5	2.85	80	15	14X14	F05 F07	Ø50 Ø70
47.5	2	155	50.8	56.5	64.0	2.85	87.5	15	14X14	F05 F07	Ø50 Ø70
60.2	2½	170	63.5	70.5	77.5	2.85	115	19	17X17	F07 F10	Ø70 Ø102
72.9	3	200	76.2	83.5	91.0	2.85	122	19	17X17	F07 F10	Ø70 Ø102
97.4	4	240	101.6	110.0	119.0	2.85	158	23	22X22	F10 F12	Ø102 Ø125