


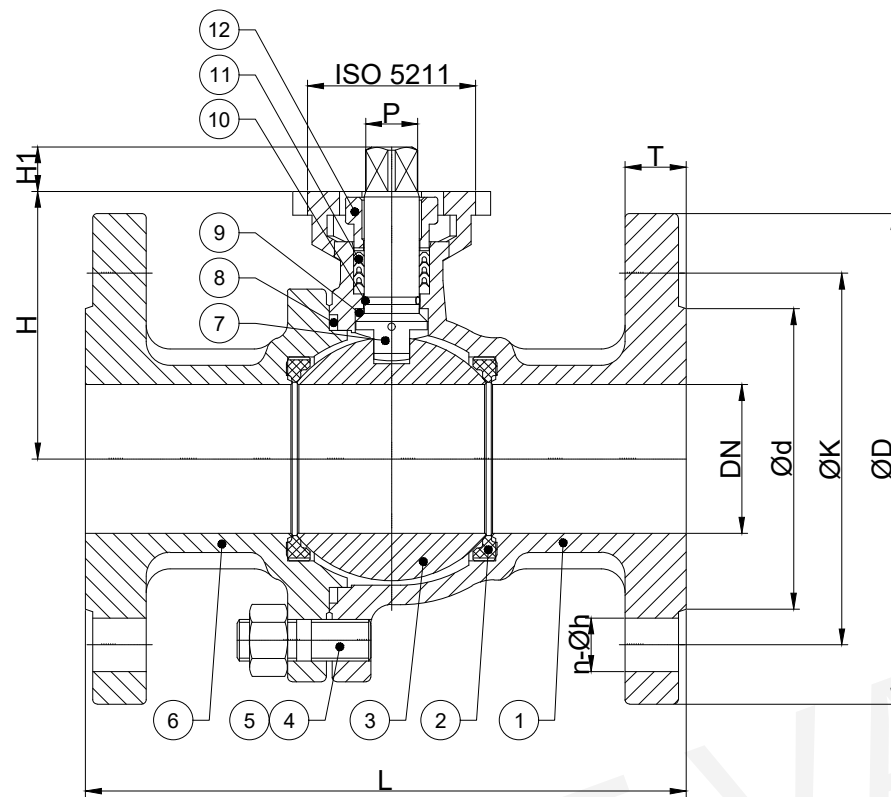

No.	Part Name	Material
1	Main Body	WCB/CF8
2	Seat	PTFE
3	Ball	SS304/SS316L
4	Double-Ended Stud	Property Class8.8/SS304
5	Hex Nut	Property Class8/SS304
6	Sub Body	WCB/CF8
7	Stem	SS304/SS316
8	Gasket	PTFE
9	Thrust Washer	R-PTFE
10	O-Ring	FKM
11	Packing	PTFE
12	Packing Gland	WCB/CF8

Two-Piece Flange Ball Valve DN15-DN200

DN	INCH	L±2	ØD	ØK	Ød	T	n-Øh	H	H1	P	ISO 5211	
mm	in										Actuator Flange	Pitch Circle Diameter
15	1/2	130	95	65	45	16	4-Ø14	51	9	9X9	F03 F05	Ø36 Ø50
20	3/4	130	105	75	58	18	4-Ø14	53	9	9X9	F03 F05	Ø36 Ø50
25	1	140	115	85	68	18	4-Ø14	67	11	11X11	F04 F05	Ø42 Ø50
32	1¼	165	140	100	78	18	4-Ø18	71	11	11X11	F04 F05	Ø42 Ø50
40	1½	165	150	110	88	18	4-Ø18	80	15	14X14	F05 F07	Ø50 Ø70
50	2	203	165	125	102	18	4-Ø18	90	15	14X14	F05 F07	Ø50 Ø70
65	2½	222	185	145	122	18	(4)8-Ø18	120	19	17X17	F07 F10	Ø70 Ø102
80	3	241	200	160	138	20	8-Ø18	127	19	17X17	F07 F10	Ø70 Ø102
100	4	305	220	180	158	20	8-Ø18	158	23	22X22	F10 F12	Ø102 Ø125
125	5	356	250	210	188	22	8-Ø18	180	23	22X22	F10 F12	Ø102 Ø125
150	6	394	285	240	212	22	8-Ø22	210	27	27X27	F12 F14	Ø125 Ø140
200	8	457	340	295	268	24	12-Ø22	257	36	36X36	F12 F14	Ø125 Ø140