
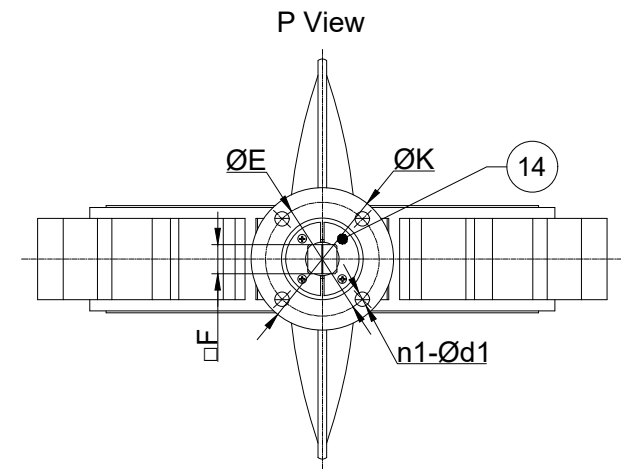


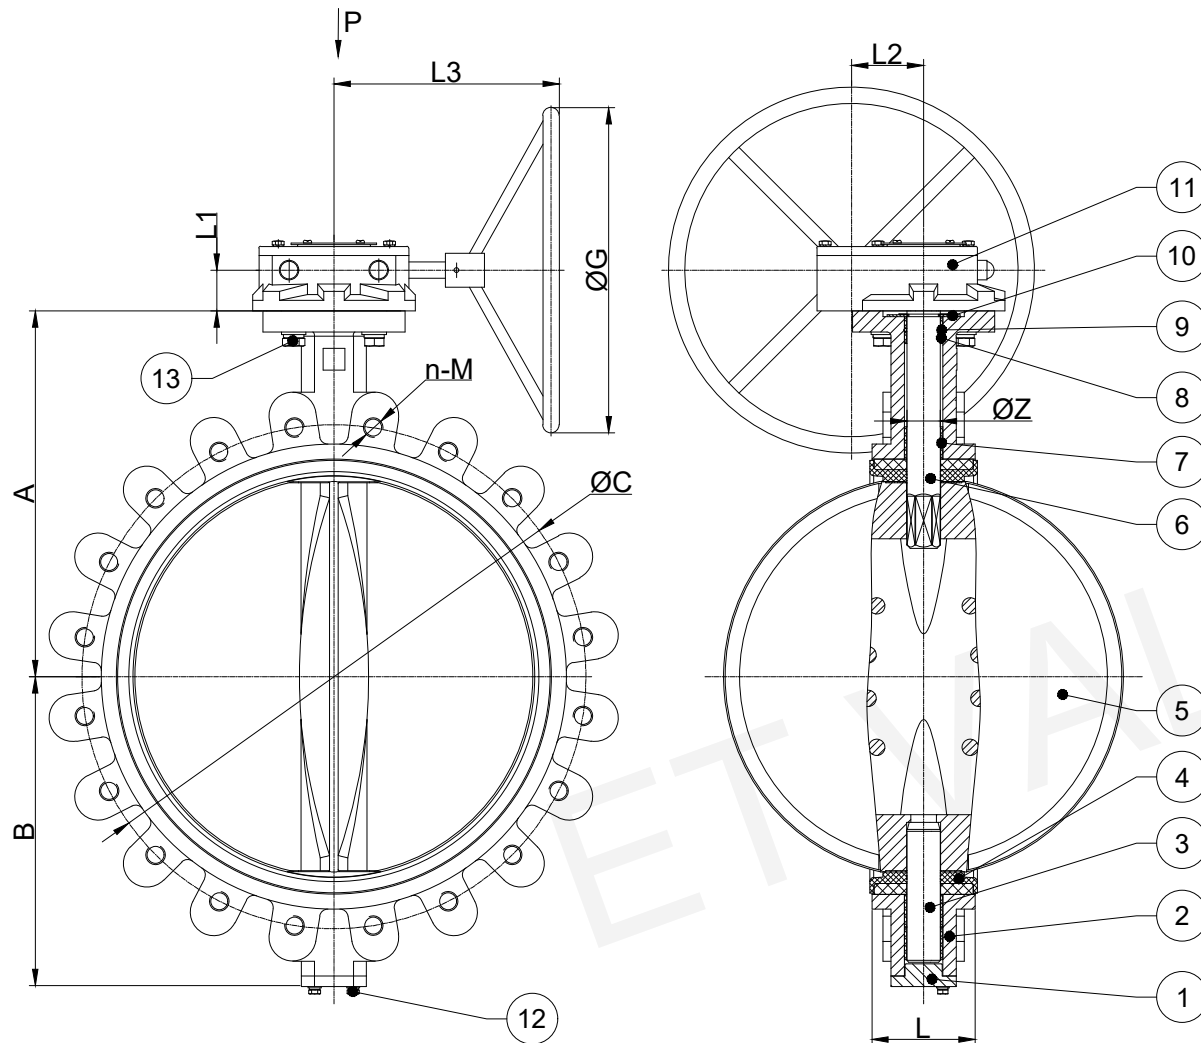

No.	Part Name	Material
1	End Cover	DI/CF8/CF8M/CF3M/2205/2507/WCB
2	Body	DI/CF8/CF8M/CF3M/2205/2507/WCB
3	Lower Shaft	SS431
4	Seat	EPDM/NBR/VITON/PTFE
5	Disc	DI/CF8/CF8M/CF3M/C95400/2205/2507
6	Upper Shaft	SS431
7	Long Bushing	FRP
8	Short Bushing	FRP
9	O-Ring	NBR
10	U-Card	SS430
11	Gear Box	DI
12	Bolt/Washer/ Spring Washer	SS304
13	Bolt/Washer/ Spring Washer	SS304
14	Screw	SS304

Gear Lug-Type Backrest-Seated Butterfly Valve DN400-DN600

DN mm	INCH in	L±2	A±1	B±1	F	ØZ	ISO 5211				PN10		PN16		150LB		L1	L2	L3	ØG
							Actuator Flange	ØK	ØE	n1-Ød1	ØC	n-M	ØC	n-M	ØC	n-M				
400	16	102	371	318	27X27	33.15	F14	175	140	4-Ø18	515	16-M24	525	16-M27	539.8	16-(1-8UNC-2B)	50	89	277	400
450	18	114	411.5	352	27X27	37.95	F14	175	140	4-Ø18	565	20-M24	585	20-M27	577.8	16-(1½-8UN-2B)	50	101	287	400
500	20	127	450	382	36X36	41.12	F14	175	140	4-Ø18	620	20-M24	650	20-M30	635.0	20-(1½-8UN-2B)	50	101	287	400
600	24	154	515	445	36X36	50.62	F16	210	165	4-Ø22	725	20-M27	770	20-M33	749.3	20-(1¼-8UN-2B)	50	153	382	500