


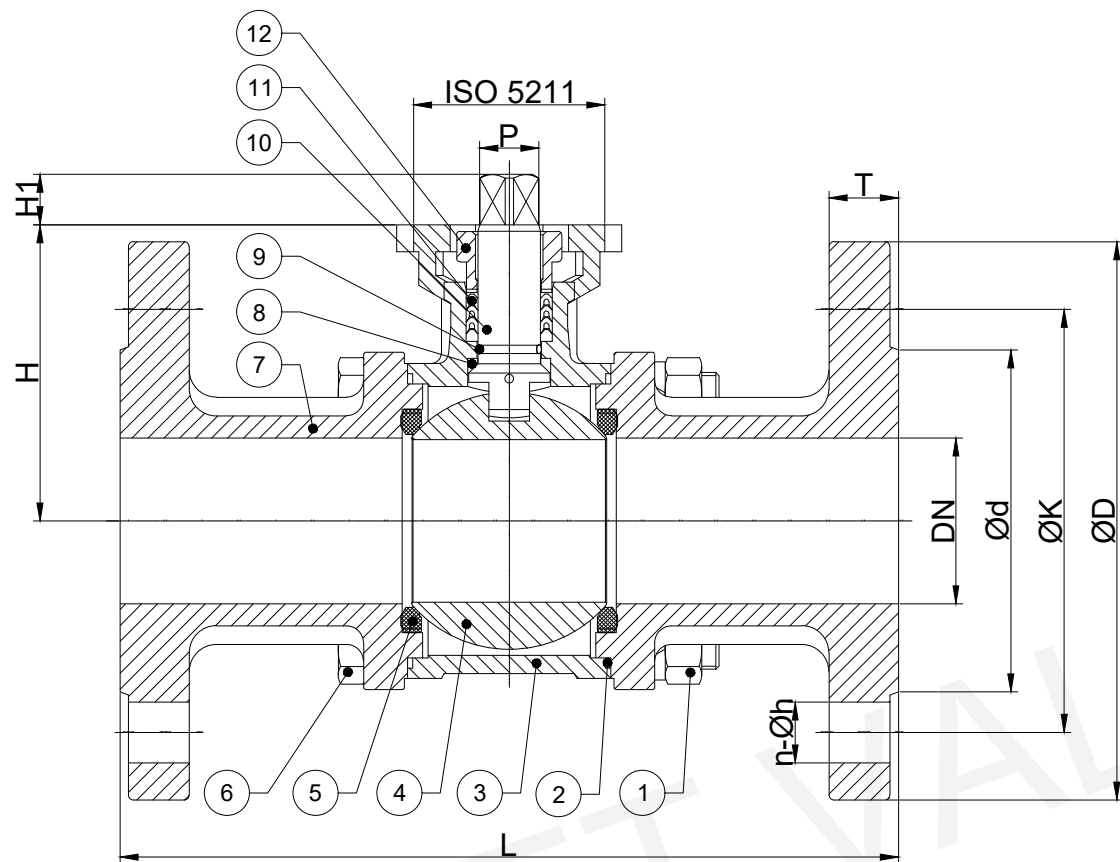

No.	Part Name	Material
1	Hex Nut	SS304
2	Gasket	PTFE/R-PTFE
3	Main Body	WCB/CF8/CF3M
4	Ball	SS304/SS316L
5	Seat	PTFE/R-PTFE
6	Bolt	SS304
7	Sub Body	WCB/CF8/CF3M
8	Thrust Washer	R-PTFE
9	O-Ring	FKM
10	Stem	SS304/SS316L
11	Packing	PTFE/R-PTFE
12	Packing Gland	WCB/CF8

Three-Piece Flange Ball Valve DN15-DN100

DN	INCH	L±2	ØD	ØK	Ød	T	n-Øh	H	H1	P	ISO 5211	
											Actuator Flange	Pitch Circle Diameter
15	1/2	130	95	65	45	16	4-Ø14	46	9	9X9	F03 F05	Ø36 Ø50
20	3/4	150	105	75	58	18	4-Ø14	47.5	9	9X9	F03 F05	Ø36 Ø50
25	1	160	115	85	68	18	4-Ø14	60	11	11X11	F04 F05	Ø42 Ø50
32	1¼	180	140	100	78	18	4-Ø18	64	11	11X11	F04 F05	Ø42 Ø50
40	1½	200	150	110	88	18	4-Ø18	80	15	14X14	F05 F07	Ø50 Ø70
50	2	230	165	125	102	18	4-Ø18	87.5	15	14X14	F05 F07	Ø50 Ø70
65	2½	290	185	145	122	18	(4)8-Ø18	115	19	17X17	F07 F10	Ø70 Ø102
80	3	310	200	160	138	20	8-Ø18	122	19	17X17	F07 F10	Ø70 Ø102
100	4	350	220	180	158	20	8-Ø18	158	23	22X22	F10 F12	Ø102 Ø125