
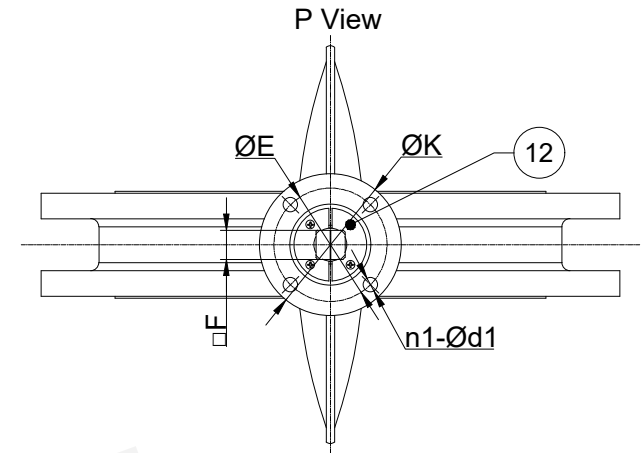


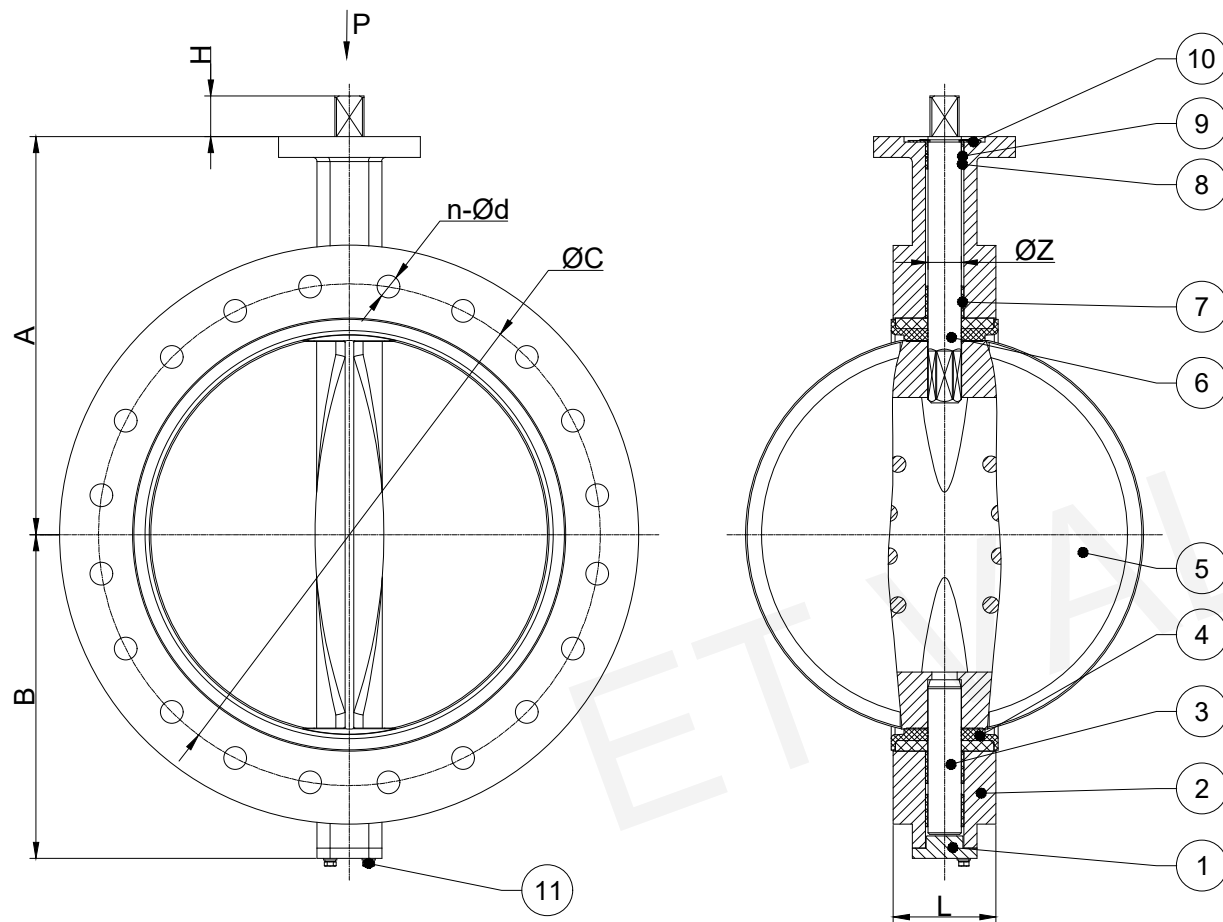

No.	Part Name	Material
1	End Cover	DI
2	Body	DI
3	Lower Shaft	SS431
4	Seat	EPDM/NBR/VITON/PTFE
5	Disc	DI/CF8/CF8M/CF3M/C95400/2205/2507
6	Upper Shaft	SS431
7	Long Bushing	FRP
8	Short Bushing	FRP
9	O-Ring	NBR
10	U-Card	SS430
11	Bolt/Washer/ Spring Washer	SS304
12	Screw	SS304

U-Type Backrest-Seated Butterfly Valve DN400-DN600

DN mm	INCH in	L±2	A±1	B±1	H	F	ØZ	ISO 5211				PN10		PN16		150LB	
								Actuator Flange	ØK	ØE	n1-Ød1	ØC	n-Ød	ØC	n-Ød	ØC	n-Ød
400	16	102	410	326	40	27X27	33.15	F14	175	140	4-Ø18	515	16-Ø28	525	16-Ø31	539.8	16-Ø28.6
450	18	114	430	343	50	27X27	37.95	F14	175	140	4-Ø18	565	20-Ø28	585	20-Ø31	577.8	16-Ø31.8
500	20	127	492	387	50	36X36	41.12	F14	175	140	4-Ø18	620	20-Ø28	650	20-Ø34	635.0	20-Ø31.8
600	24	154	584	445	50	36X36	50.62	F16	210	165	4-Ø22	725	20-Ø31	770	20-Ø37	749.3	20-Ø35